



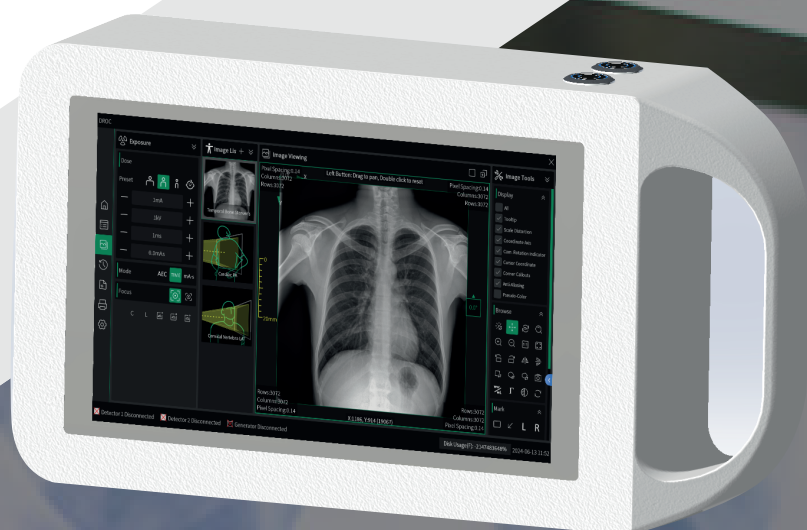

Portable X ray

MSLGX26

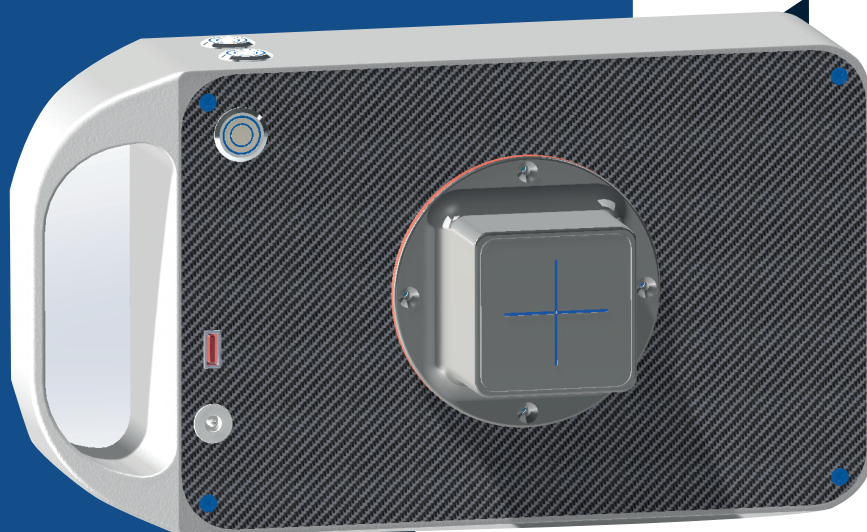

Portable X ray



Parameters	MSL GX26
Maximum power kW	800W
Power supply mode	Lithium battery 25.2VDC
Operating frequency	100kHz
kV range	40 ~ 85kV adjustable
mA range	1 ~ 16mA adjustable
Exposure time range	0.01s ~ 4.0s
mAs variation range	0.10mAs ~ 10.0mAs
Exposure mode	Remote control, buttons
Die focus (mm)	0.8
Operating system	Win10/Win11
Operation interface	8-inch LCD screen
Weight	4kg
Appearance dimensions	280*112*155 (mm)
Configuration list	1. Portable X-ray machine 1 unit; 2. Power configurator 1 unit 3. Remote controller 1 unit

Note: It comes with computer operating system, wireless WIFI, unique DROC software
Optional: MSLFP Series flat panel

MEDSINGLONG CO LTD

 Floor 1st,4th,5th,NO.85th,87th,89th Baiyun Road,Shiqiao Street,
Panyu District,Guangzhou city,China.

 www.watermed.com